


PowerMAX

Feature-packed sub-meter GPS positioning

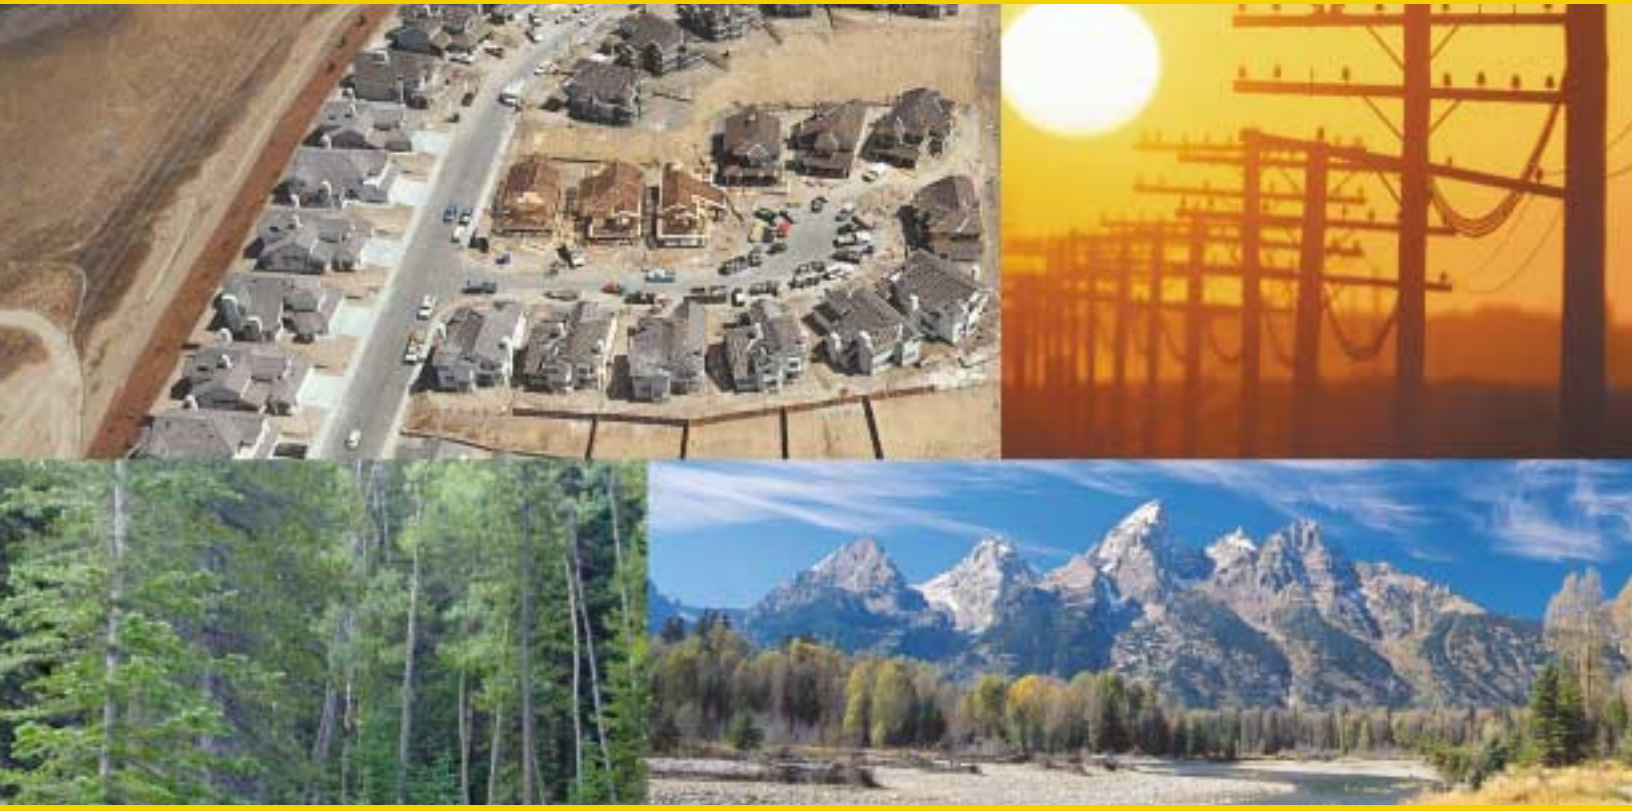

PowerMAX

- Equipped with Bluetooth™ wireless technology
- Provides reception of GPS, SBAS, and Coast Guard beacon
- Automatic dual channel SBAS and beacon tracking for more reliable signal reception
- Delivers sub-meter positioning at rates of 5 Hz
- COAST™ technology uses old differential corrections for up to 40 minutes, or more, without significant performance loss
- Small and lightweight form-factor
- Front-panel LED indicators make it easy to monitor receiver status
- Compatible with CSI Wireless' optional e-Dif autonomous differential technology



PowerMAX Feature-packed sub-meter GPS positioning

GPS Sensor Specifications

Receiver Type:	LI, C/A code, with carrier phase smoothing
Channels:	12-channel, parallel tracking (10-channel when tracking SBAS)
WAAS Tracking:	2-channel, parallel tracking
Update Rate:	1 Hz default, 5 Hz max
Horizontal Accuracy:	<1 m 95% confidence (DGPS*) <5 m 95% confidence** (autonomous, no SA)
Cold Start:	1 min typical
Antenna Input Impedance:	50 Ω

Beacon Sensor Specifications

Channels:	2-channel, parallel tracking
Frequency Range:	283.5 to 325 kHz
Channel Spacing:	500 Hz
MSK Bit Rates:	50, 100, and 200 bps
Operating Modes:	Manual, automatic, semi-automatic
Cold Start Time:	< 1 minute typical
Reacquisition Time:	< 2 seconds typical
Demodulation:	Minimum shift keying (MSK)
Sensitivity:	2.5 μ V for 6 dB SNR @ 200 bps
Dynamic Range:	100 dB
Frequency Offset:	\pm 8 Hz (~ 27 ppm)
Adjacent Channel Rejection:	61 dB \pm 1 dB @ $f_0 \pm$ 400 Hz

Bluetooth!™

Bluetooth spec. version:	1.1
Bluetooth power class:	1

Communications

Serial ports:	2 full duplex
Interface Level:	RS-232C
Baud Rates:	4800, 9600, 19200
Correction Input / Output Protocol:	RTCM SC-104
Data Input / Output Protocol:	NMEA 0183
Raw Measurement Data:	Proprietary binary (RINEX utility available)
Timing Output:	1 PPS (HCMOS, active high, rising edge sync, 10 k Ω , 10 pF load)

Environmental

Operating Temperature:	-32°C to +74°C
Storage Temperature:	-40°C to +85°C
Humidity:	95% non-condensing
EMC:	FCC Part 15, Subpart B, Class B CISPR 22

Power

Input Voltage Range:	9 to 32 VDC
Reverse Polarity Protection:	Yes
Power Consumption:	3W
Current Consumption:	< 250 mA @ 12 VDC
Antenna Voltage Output:	5.3 VDC
Antenna Short Circuit Protection:	Yes

Mechanical

Enclosure:	Powder-coated aluminum
Dimensions:	134.9 mm L x 114 mm W x 37.1 mm H (5.31" L x 4.49" W x 1.46" H)
Weight:	0.80 kg (1.76 lb)
LED Indicators	Power, GPS lock, differential lock and DGPS position
Power Connector:	2-pin miniature
Data Connector:	DB9-socket
Antenna Connector:	TNC-socket

Pin-out

Pin 2	Transmit data (TXD)
Pin 3	Receive data (RXD)
Pin 5	Signal ground

MGL-3 Antenna

GPS frequency:	LI (1.575 MHz)
GPS LNA Gain:	28 dB
Beacon frequency range:	283.5 kHz - 325.0 kHz
Beacon LNA Gain:	34 dB
Dimensions:	128 mm L x 128 mm W x 84 mm H (5.06" L x 5.06" W x 3.33" H)
Weight:	450 g (1.0 lb)
Antenna Connector:	TNC-socket
Enclosure:	ABS - PC
Mounting Thread:	1-14-UNS-2B
Input Voltage:	4.9 to 13 VDC supplied by receiver
Input Current:	50 to 60 mA
Operating Temp.:	-30°C to +70°C
Storage Temp.:	-40°C to +80°C
Relative Humidity:	100% condensing

* SVs > 5, HDOP < 2, RTCM SC-104 correction data from a dual frequency reference station, short baseline, and low multipath environment.

** Dependent upon ionospheric activity and multipath

© Copyright September 2002, CSI Wireless Inc. All rights reserved. Specifications subject to change without notice. CSI Wireless, the CSI Wireless logo, and COAST™ are trademarks of CSI Wireless Inc. Made in Canada.

Warranty: Each CSI Wireless product is covered by a limited one-year warranty on parts and labor.

Other companies and products mentioned herein are trademarks or registered trademarks of their respective trademark owners.

CSI Wireless Dealer



Avery label #05260 (laser print)

Printed in Canada.



4110 - 9th Street SE • Calgary • AB • Canada • T2G 3C4
Phone (403) 259-3311 • Fax (403) 259-8866